

INDEX	PAGE(S)
ElevaTek workstations	178 - 179
Preconfigured Models . . .	180 - 182
Step by Step	183 - 190
Accessories	190 - 207

ELEVATEK ADJUSTABLE WORKSTATION

The stylish and streamlined ElevaTek combines great ergonomics and good looks. Designed with meticulous attention to detail, this height-adjustable workstation is suited to a wide variety of tasks. Whether you choose electric, crank or manual adjustment, the ElevaTek ensures you can always work comfortably and efficiently.

The ElevaTek is available as a stationary or mobile unit, with centered or cantilever legs, and is compatible with a vast range of useful accessories. Among the new options is a laboratory top, power solutions, and an integrated mobile cabinet, which is designed to maximize your adaptability and productivity.


With the ElevaTek, every detail has been carefully considered.

ElevaTek is a trademark of Rousseau Metal Inc.

CUSTOMIZE YOUR ELEVATEK WORKSTATION
WITH THE MYMODEL-R ONLINE CONFIGURATOR



DISTINCTIVE FEATURES



Multiple work surface options, including a laboratory top made from phenolic resin.




Uprights attach to the back of the workstation, leaving the entire work surface usable.



Accessories seamlessly integrate with no visible screws or gaps, offering a uniform overall look.



Optional drawer units and mobile cabinets can be added under the work surface.



Uprights have up to four (4) mounting zones for the various accessories.



Three height adjustment systems available: electric, crank and manual.

GENERAL DIMENSIONS

HEIGHTS



LOWEST POSITION



HIGHEST POSITION

NOTES: The total height shown (from surface to ground) includes a 1"-thick top. [See pages 186-187.](#)
Adjustable range of 15.75 inches.

WIDTHS AND DEPTHS AVAILABLE

NOTE: Popular dimensions are shown in red.




EK12KL-CC1



EK29KH-ED2002

HEIGHT ADJUSTMENT SYSTEMS

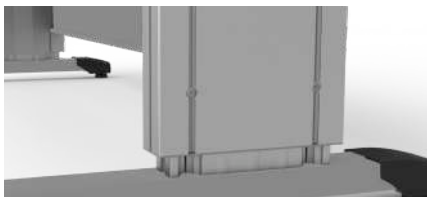

MANUAL ADJUSTMENT



CRANK LIFTING SYSTEM




ELECTRIC LIFTING SYSTEM

PRECONFIGURED MODELS



DIMENSIONAL LOGIC

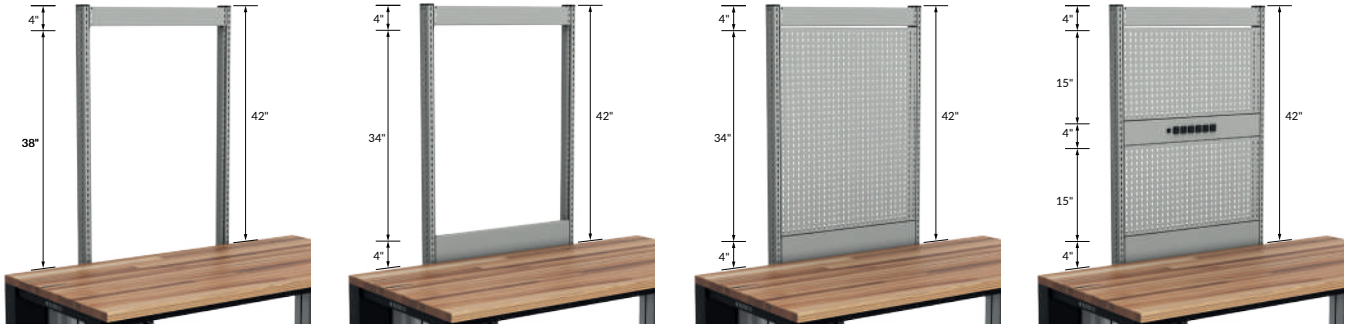

ELEVATEK ADJUSTABLE WORKBENCHES

CENTERED ELEVATEK ADJUSTABLE WORKBENCH



WHEN ORDERING A **CENTERED ELEVATEK ADJUSTABLE WORKBENCH, MODEL NUMBERS MUST BE COMPLETED AS FOLLOWS**

Type of top:
 1 = Painted steel
 2 = Laminated hardwood
 3 = Plastic laminate (grey)
 4 = Dissipative
 5 = Laboratory
 6 = Stainless steel
 7 = Plastic laminate (black)
 8 = Resistant acrylic/
 PVC laminate
 9 = Plastic laminate (white)

Workbench width:
 E = 36"
 H = 48"
 K = 60"
 L = 72"

Workbench depth:
 H = 30"
 J = 36"
 F = 42"
 L = 48"

Workbench type:
 1 = Mobile
 2 = Stationary

Height adjustment system:
 M = Manual
 C = Crank
 E = Electric

EK1 - C

e.g., EK12KL-EC2

For a 60"W x 48"D stationary ElevaTek adjustable workbench with centered legs and electric lifting system.

CANTILEVER (OFF-CENTERED) ELEVATEK ADJUSTABLE WORKBENCH



WHEN ORDERING A **CANTILEVER (OFF-CENTERED) ELEVATEK ADJUSTABLE WORKBENCH, MODEL NUMBERS MUST BE COMPLETED AS FOLLOWS**

Type of top:
 1 = Painted steel
 2 = Laminated hardwood
 3 = Plastic laminate (grey)
 4 = Dissipative
 5 = Laboratory
 6 = Stainless steel
 7 = Plastic laminate (black)
 8 = Resistant acrylic/
 PVC laminate
 9 = Plastic laminate (white)

Workbench width:
 E = 36"
 H = 48"
 K = 60"
 L = 72"

Workbench depth:
 H = 30"
 J = 36"

Workbench type:
 1 = Mobile
 2 = Stationary

Height adjustment system:
 M = Manual
 C = Crank
 E = Electric

EK1 - D

e.g., EK12KH-ED2

For a 60"W x 30"D stationary ElevaTek adjustable workbench with cantilever (off-centered) legs and electric height adjustment system.

NOTES: The station height range is from 29"H to 45"H.
 The stringer and the cover-stringer are included.
 The workbench with cantilever (off-centered) legs allows the addition of uprights.
 The workbench with centered legs does not allow the addition of uprights.
 Models with dissipative tops include an ESD protection kit for workstations. [See page 203.](#)



ELEVATEK ADJUSTABLE WORKSTATIONS

STATIONARY MODELS

EK24KH-ED2003



EK14KH-ED2

ELEVATEK ADJUSTABLE WORKSTATION WITH ESD PROTECTION KIT



PRODUCT NO.	W×D×H
EK24KH-ED2003	60"×30"×74" to 90"
1 Stationary workbench with electric height adjustment system, frame and dissipative top	
EK14KH-ED2	
1 Upright bracket	EF20-6030
2 Pairs of uprights	EU10-42
1 Front crossmember with six 15A outlets	EP30-3004-031
1 Front crossmember without perforations	EP30-3004-010
1 Overhead support	EA40-26-02
1 Overhead LED workstation light	EA43-60
1 Finishing panel	EP10-3034
1 Height-adjustable two-section articulating arm for monitor	EA61-02
1 Front backplash with grommet	EU40-3004-080
1 Utility panel	EP12-3034
2 Light-duty shelves	EA28-1508
1 Can holder	WM9D-01
1 Pliers holder	WM9M-01
1 Front backplash with five 15A outlets and one USB port (1 A, 1 C)	EU40-3004-041
1 Grounding cord, 6'	EA94-01

WORKBENCH WITH ELECTRIC HEIGHT ADJUSTMENT SYSTEM



PRODUCT NO.	W×D×H
EK14KH-ED2	60"×30"×29" to 45"
1 Dissipative top	ES17-6030-WB
1 Frame	EF10-6030
1 ESD protection kit for workstations	EA90-01
2 Cantilever (off-centered) stationary electric legs with a stringer	EL14-6030-02
1 Cover-stringer	EL61-60

EK28LH-ED2004



EK18LH-ED2

ELEVATEK ADJUSTABLE WORKSTATION



PRODUCT NO.	W×D×H
EK28LH-ED2004	72"×30"×83" to 99"
1 Stationary workbench with electric height adjustment system, frame and resistant acrylic/PVC laminate top	
EK18LH-ED2	
1 Upright bracket	EF20-7230
1 Single bench frame with front crossmember without perforations	EU11-7248-010
1 Perforated painted steel shelf	EA11-7212
1 Painted steel shelf backstop	EA07-72
4 Partial dividers	SH52-1206
1 Painted steel solid shelf	EA10-7212
4 Adjustable dividers	EA06-1210
1 Paper/cardboard spool holder	EA33-72

WORKBENCH WITH ELECTRIC HEIGHT ADJUSTMENT SYSTEM



PRODUCT NO.	W×D×H
EK18LH-ED2	72"×30"×29" to 45"
1 Resistant acrylic / PVC laminate top	ES08-7230-GI
1 Frame	EF10-7230
2 Cantilever (off-centered) stationary electric legs with a stringer	EL14-7230-02
1 Cover-stringer	EL61-72

PRECONFIGURED MODELS



MOBILE MODELS

EK27LH-ED1005



EK17LH-ED1

ELEVATEK ADJUSTABLE WORKSTATION



PRODUCT NO.	W×D×H
EK27LH-ED1005	72" × 30" × 77" to 93"
1 Mobile workbench with electric height adjustment system, frame and black laminate top	EK17LH-ED1
1 Upright bracket	EF20-7230
2 Pairs of uprights	EU10-48
1 Front crossmember with six 15A outlets	EP30-3604-031
1 Front crossmember without perforations	EP30-3604-010
1 Utility panel	EP12-3618
1 Light-duty shelf	EA28-1508
1 Power outlet channel with six 15A power outlets	EP20-3604-041
1 Finishing panel	EP10-3618
1 Front backsplash with six 15A outlets	EU40-3604-041
1 Storage cabinet with flipper door	ED75-36142111L3
1 Utility panel	EP12-3634
1 Pliers holder	WM9M-01
1 Screwdriver holder	WM9N-02
1 Front backsplash with grommet	EU40-3604-080
1 Light-duty drawer unit	ED79-21301403B

WORKBENCH WITH ELECTRIC HEIGHT ADJUSTMENT SYSTEM



PRODUCT NO.	W×D×H
EK17LH-ED1	72" × 30" × 29" to 45"
1 Black plastic laminate top	ES16-7230-BA
1 Frame	EF10-7230
2 Cantilever (off-centered) mobile electric legs with a stringer	EL14-7230-01
1 Cover-stringer	EL61-72

EK22KH-CD1006



EK12KH-CD1

ELEVATEK ADJUSTABLE WORKSTATION



PRODUCT NO.	W×D×H
EK22KH-CD1006	60" × 30" × 71" to 87"
1 Mobile workbench with crank height adjustment system, frame and laminated hardwood top	EK12KH-CD1
1 Upright bracket	EF20-6030
1 Pair of uprights	EU10-42
1 Front crossmember without perforations	EP30-3004-010
1 Storage cabinet with door	ED75-30142101L3
2 Plastic bin rails	EA32-30
2 Plastic bins	RG20-060303
1 Heavy-duty articulating laptop arm	EA60-42
1 Preconfigured mobile cabinet under the work surface	E3BBD-2402L3B

WORKBENCH WITH CRANK HEIGHT ADJUSTMENT SYSTEM



PRODUCT NO.	W×D×H
EK12KH-CD1	60" × 30" × 29" to 45"
1 Laminated hardwood top	ES14-6030
1 Frame	EF10-6030
2 Cantilever (off-centered) mobile crank legs with a stringer	EL12-6030-01
1 Cover-stringer	EL61-60



6 EASY STEPS


In just six steps, we can help you configure your own workstation quickly and easily.



EK24KH-ED2003

STEP 1: SELECT LEGS AND DIMENSIONS

- Select the leg position: centered or cantilever (off-centered)
- Select the desired height adjustment system: manual, crank or electric

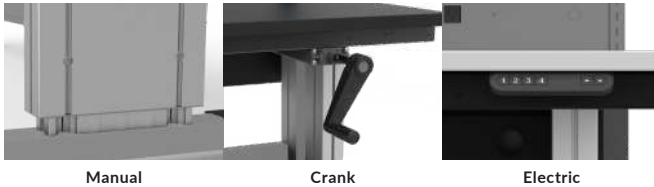

- Specify the workstation dimensions (width and depth)

LEG POSITION	WIDTH	DEPTH
Centered	36" / 48" / 60" / 72"	30" / 36" / 42" / 48"
Cantilever (off-centered)	36" / 48" / 60" / 72"	30" / 36"

NOTE: Adjustable height range of 15.75 inches.

- Select the type of workstation: stationary or mobile

STEP 2: ADD A FRAME

Add a frame to install your work surface onto it. The frame's dimensions are based on the workstation width and depth.

STEP 3: SELECT A WORK SURFACE

Choose from the available work surface options:

- Acrylic/PVC laminate
- Painted steel
- Stainless steel
- Laminated hardwood
- Plastic laminate (white, black or gray)
- Dissipative laminate (ESD)
- Laboratory (phenolic)

STEPS 4 TO 6 ARE FOR WORKSTATIONS WITH CANTILEVER (OFF-CENTERED) LEGS ONLY

STEP 4: UPRIGHT BRACKET

Add the upright bracket. These dimensions are based on the workstation width and depth. The bracket is required for the next step.

STEP 5: UPRIGHTS/ZONES

Specify the overall width. This dimension must be smaller or equal to the workbench width.

Choose the number of zones and their dimensions.

ZONES	WIDTH	HEIGHT
Single frame	18" / 20" / 24" / 30" / 32" / 36" / 48" / 60" / 72"	24" / 30" / 36" / 42" / 48"
Double frame	36" / 48" / 60" / 72"	24" / 30" / 36" / 42" / 48"
Triple frame	60" / 72"	24" / 30" / 36" / 42" / 48"

Then select your crossmember options:

- No perforations
- With pneumatic connection
- With 6 x 15A power outlets
- With 5 x power outlets and 2 x USB ports (1 A, 1 C)

STEP 6: ACCESSORIES


Finally, add your choice of accessories to the workstation.

STEP BY STEP



1 SELECT LEGS AND DIMENSIONS

Select the legs, options and dimensions. The explanations and illustrations on pages 184-185 will help you decide.

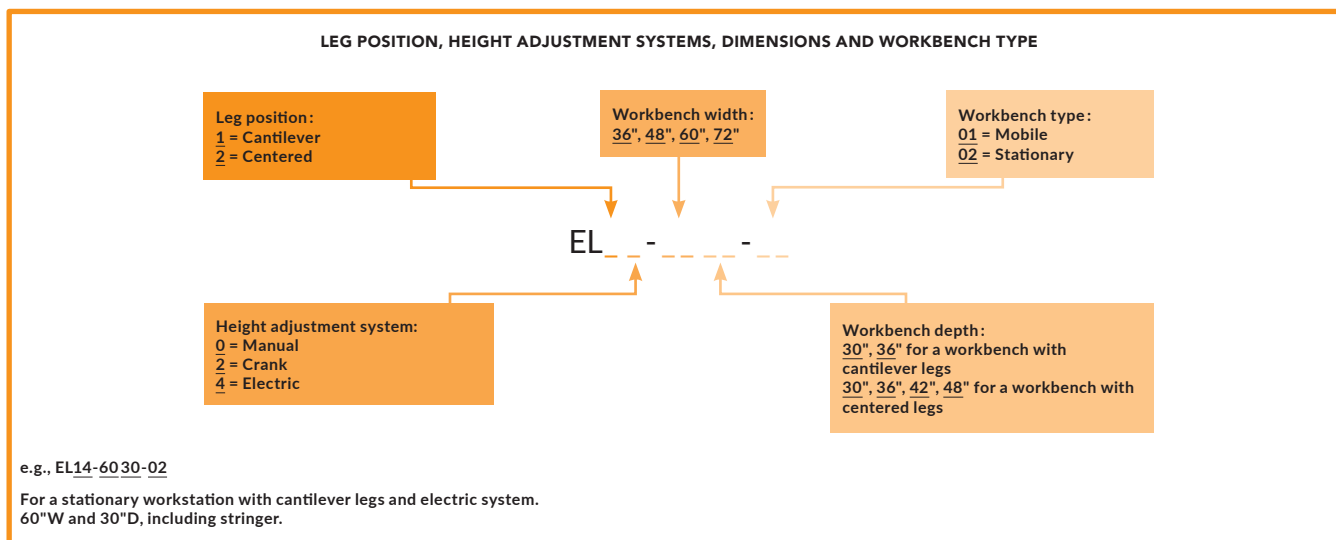

HEIGHT ADJUSTMENT SYSTEM

MANUAL ADJUSTMENT

EL10 / EL20



- Recommended for infrequent adjustment or during installation
- Height can be adjusted in 1" increments with a Hex key
- Adjustable range of 15.75"
- Load capacity of the system: 1,000lb.

PRODUCT NO.	LEG POSITION
EL10-____-	Cantilever (off-centered)
EL20-____-	Centered

CRANK LIFTING SYSTEM

EL12 / EL22



- For adjusting the height of the workstation quickly and easily for different tasks
- No electric power required
- Crank can be installed on the left or right
- Retractable crank handle
- Quick-release system for easy crank removal
- Adjustable range of 15.75"
- Load capacity of the system: 675lb.
- Speed: 5mm per crank turn

PRODUCT NO.	LEG POSITION
EL12-____-	Cantilever (off-centered)
EL22-____-	Centered

ELECTRIC LIFTING SYSTEM

EL14 / EL24



- For adjusting the height of the workstation quickly and easily for different tasks
- 4 configurable position presets
- Controls can be installed on the left or right
- Adjustable range of 15.75"
- Load capacity of the system: 1,000lb.
- Speed: 9mm/s
- 55 decibels when in use

PRODUCT NO.	LEG POSITION
EL14-____-	Cantilever (off-centered)
EL24-____-	Centered



LEG POSITION



CANTILEVER (OFF-CENTERED) LEGS

- Provides better ergonomics and more space for user's legs
- Compatible with EU uprights



CENTERED LEGS

- Allows both the front and back of the workbench to be used for tasks
- Note that uprights can't be added with this option

WORKBENCH TYPE

MOBILE



- Fitted with 3" swivel casters with brake

PRODUCT NO.	LEG POSITION
EL1-_-_-01	Cantilever (off-centered)
EL2-_-_-01	Centered

STATIONARY



- Fitted with leveling glides that can be height adjusted by 3/4"
- Optional floor anchoring kit available (EL86-01)

PRODUCT NO.	LEG POSITION
EL1-_-_-02	Cantilever (off-centered)
EL2-_-_-02	Centered

WORKBENCH WIDTH

STRINGER



- The stringer width is always the same as the frame width and work surface width. It is included in the leg selection at step 1
- The stringer provides structural rigidity for the ElevaTek workstation

COVER-STRINGER

EL61



- Allows closing the back of the stringer for a neat appearance
- Prevents dust or dirt buildup inside the stringer
- To order: Specify the width required: 36", 48", 60" or 72"

PRODUCT NO.
EL61-__

2 ADD A FRAME

The frame's dimensions are based on the workstation width and depth.

FRAME

EF10




- Core component for the workstation structure
- Color: textured black
- To order: Specify the width required: 36", 48", 60" or 72"

PRODUCT NO.	DEPTH	LEG POSITION
EF10-__30	30"	Centered
EF10-__36	36"	
EF10-__42	42"	
EF10-__48	48"	
EF10-__30	30"	Cantilever (off-centered)
EF10-__36	36"	

FRAME

The frame is perforated for installing the height adjustment system, attaching the work surface, and running cables.

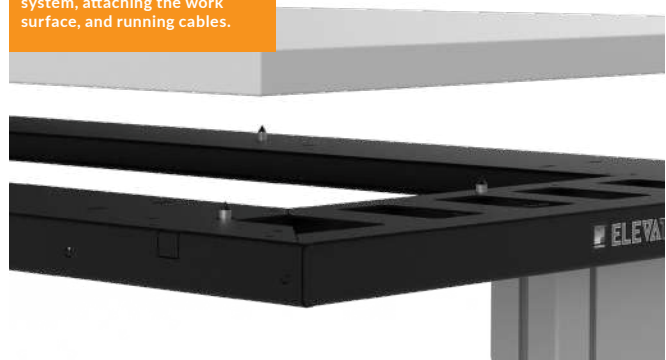

STEP BY STEP



3 CHOOSE TOP

RESISTANT ACRYLIC/PVC
LAMINATE TOP

ES08



- Ideal for assembly stations and for applications using solvents, oils or other chemical products
- Thickness: 1"
- Color: gray
- Sides protected with 3mm-thick durable PVC
- Excellent chemical resistance (can be in prolonged contact with a substance)
- Superior impact and abrasion resistance compared with standard laminate tops
- Attractive appearance
- Predrilled for easier installation

PAINTED STEEL TOP

ES10



- Top for industrial, maintenance, repair and assembly applications
- Thickness: 1". 12ga steel
- Powder painted steel
- Top complies with CARB regulations on formaldehyde emissions
- Underside sealed with a protective sheet
- Corners are welded and sanded for an attractive finish
- Predrilled for easier installation
- Excellent impact resistance

STAINLESS STEEL TOP

ES12



- Top for industrial, maintenance, repair and assembly applications, or for when solvents, oils and other chemical products are used
- Thickness: 1". 12ga steel
- #4 brushed finish, attractive appearance
- Excellent corrosion and chemical resistance (can be in prolonged contact with a substance)
- Top complies with CARB regulations on formaldehyde emissions
- Underside sealed with a protective sheet
- Corners are welded and sanded for an attractive finish
- Predrilled for easier installation

LAMINATED HARDWOOD TOP

ES14



- Top for general industrial applications
- Thickness: 1 1/8"
- Made from varnished hardwood slats
- High impact resistance
- Attractive appearance
- Predrilled for easier installation

PLASTIC LAMINATE TOP

ES16



- Top for general use. Ideal for assembly stations, quality control and packaging
- Thickness: 1"
- Sides protected with 3mm-thick durable PVC
- Attractive appearance
- Easy to clean
- Predrilled for easier installation
- To order: Specify the color required, e.g., ES16-6030-BA, for a black top

White
-WABlack
-BAGrey
-GB

DISSIPATIVE TOP

ES17



- Top for electronics tasks. Ideal for electronics inspection and assembly stations
- Thickness: 1"
- Sides protected with 3mm-thick durable PVC
- Color: white
- Attractive appearance
- Easy to clean
- Dissipates electrical charges that can damage electronic components
- The resistance point to point and point to ground is between 10⁶Ω and 10⁹Ω
- Predrilled for easier installation

NOTE: Grounding accessories are sold separately. See page 203.



LABORATORY TOP (PHENOLIC)

ES20



- Top for laboratory tasks
- Excellent corrosion resistance
- Excellent resistance to stains and chemical products used in labs
- Solid laminate made from laboratory-grade phenolic resin
- Thickness: 3/4"
- Color: black
- Predrilled for easier installation



PREDRILLED TOPS

Tops are predrilled for easier installation onto the frame

DIMENSIONS		TYPE OF TOPS							
W	D	ACRYLIC/PVC LAMINATE	PAINTED STEEL	STAINLESS STEEL	LAMINATED HARDWOOD	PLASTIC LAM.	DISSIPATIVE	LABORATORY (PHENOLIC)	
36"	30"	ES08-3630-GI	ES10-3630	ES12-3630	ES14-3630	ES16-3630-__	ES17-3630-WB	ES20-3630	
	36"	ES08-3636-GI	ES10-3636	ES12-3636	ES14-3636	ES16-3636-__	ES17-3636-WB	ES20-3636	
	42"	ES08-3642-GI	ES10-3642	ES12-3642	ES14-3642	ES16-3642-__	ES17-3642-WB	ES20-3642	
	48"	ES08-3648-GI	ES10-3648	ES12-3648	ES14-3648	ES16-3648-__	ES17-3648-WB	ES20-3648	
48"	30"	ES08-4830-GI	ES10-4830	ES12-4830	ES14-4830	ES16-4830-__	ES17-4830-WB	ES20-4830	
	36"	ES08-4836-GI	ES10-4836	ES12-4836	ES14-4836	ES16-4836-__	ES17-4836-WB	ES20-4836	
	42"	ES08-4842-GI	ES10-4842	ES12-4842	ES14-4842	ES16-4842-__	ES17-4842-WB	ES20-4842	
	48"	ES08-4848-GI	ES10-4848	ES12-4848	ES14-4848	ES16-4848-__	ES17-4848-WB	ES20-4848	
60"	30"	ES08-6030-GI	ES10-6030	ES12-6030	ES14-6030	ES16-6030-__	ES17-6030-WB	ES20-6030	
	36"	ES08-6036-GI	ES10-6036	ES12-6036	ES14-6036	ES16-6036-__	ES17-6036-WB	ES20-6036	
	42"	ES08-6042-GI	ES10-6042	ES12-6042	ES14-6042	ES16-6042-__	ES17-6042-WB	ES20-6042	
	48"	ES08-6048-GI	ES10-6048	ES12-6048	ES14-6048	ES16-6048-__	ES17-6048-WB	ES20-6048	
72"	30"	ES08-7230-GI	ES10-7230	ES12-7230	ES14-7230	ES16-7230-__	ES17-7230-WB	ES20-7230	
	36"	ES08-7236-GI	ES10-7236	ES12-7236	ES14-7236	ES16-7236-__	ES17-7236-WB	ES20-7236	
	42"	ES08-7242-GI	ES10-7242	ES12-7242	ES14-7242	ES16-7242-__	ES17-7242-WB	ES20-7242	
	48"	ES08-7248-GI	ES10-7248	ES12-7248	ES14-7248	ES16-7248-__	ES17-7248-WB	ES20-7248	

STEP BY STEP



STEPS 4 TO 6 ARE FOR WORKSTATIONS WITH CANTILEVER (OFF-CENTERED) LEGS ONLY

4 UPRIGHT BRACKET

UPRIGHT BRACKET

EF20



- For adding EU uprights to an ElevaTek workstation with cantilever legs
- Uprights can be placed anywhere along the bracket
- Includes a channel for running cables from one side to the other
- Space at the rear for cable management
- Color: textured black
- Specify the width required: 36", 48", 60" and 72"

PRODUCT NO.	DEPTH
EF20-__30	30"
EF20-__36	36"




5 UPRIGHTS/ZONES

EU BENCH FRAME


EU11 / EU12 / EU13



Single frame (EU11)

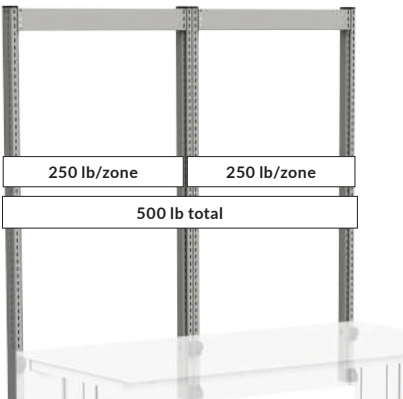

Double frame (EU12)

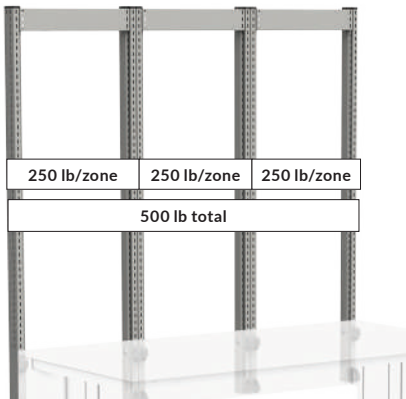

Triple frame (EU13)

- Installs on the upright bracket at the back of the workstation
- Leaves the work surface completely clear
- Provides up to four mounting zones to minimize interference between components
- Perforated on the front and back faces in 1" increments c/c for optimal placement of accessories **1 2 3 4**
- Includes an inner mounting zone for panels, crossmembers, and backslashes at the front and rear **1 2**; a mounting zone for accessories at the front **3**; and a mounting zone on the side **4** for computer arms
- Load capacity: 250lb. per zone, 500lb. total per workstation
- Widths available for double bench frames (EU12): 36", 48", 60" and 72"
- Widths available for triple bench frames (EU13): 60" and 72"
- Specify the number of zones required:
 - EU11 for a single bench frame
 - EU12 for a double bench frame
 - EU13 for a triple bench frame
- Options available based on the crossmember
 - 10: No perforations
 - 20: Pneumatic connection
 - 31: 6 power outlets (15A) for 15A circuits
 - 41: 5 x 15A power outlets (for 15A circuits) and 2 x USB ports (1 A, 1 C)

NOTES: The upright bracket and uprights extend 3" deeper than the work surface.
For example, a workstation with 30"D top will be 33"D overall.
Compatible with cantilever (off-centered) legs only.

SPECIFY THE NUMBER OF ZONES, DIMENSIONS AND CROSSMEMBER OPTIONS

Number of zones:
1 = Single frame
2 = Double frame
3 = Triple frame

Overall zone width:
18", 20", 24", 30", 32", 36", 48", 60", 72"

EU1 - - - - - 0

Zone height:
24", 30", 36", 42", 48"

Crossmember options:
10 = No perforations
20 = Pneumatic connections
31 = 6 x 15A power outlets
41 = 5 x 15A power outlets and 2 x USB ports (1 A, 1 C)

e.g., EU11-6048-031

For a 60"W x 48"D single bench frame and crossmember option with 6 x 15A power outlets.

NOTES: One zone (EU11) includes an EU10 upright kit and an EP30 crossmember.
Two zones (EU12) includes two EU10 upright kits and two identical EP30 crossmembers.
Three zones (EU13) includes three EU10 upright kits and three identical EP30 crossmembers.

UPRIGHTS

EU10



One pair

- Sold in pairs
- The uprights can be installed on the left or right or reversed to create a pair of common upright
- Installs on the upright bracket at the back of the workstation
- Leaves the work surface completely clear
- The upper part of the uprights includes an endcap with a sliding button that prevents the crossmembers and cantilever arm from coming loose

PRODUCT NO.	HEIGHT
EU10-24	24"
EU10-30	30"
EU10-36	36"
EU10-42	42"
EU10-48	48"




Two pairs

LEFT-RIGHT USE:
Four mounting zones available

- FRONT INNER mounting zone for panels, crossmembers and backsplashes
- REAR INNER mounting zone for panels, crossmembers and backsplashes
- FRONT mounting zones for installing accessories such as shelves, cantilever arms, spool holders, etc.
- SIDE mounting zone for installing computer arms

USE AS A COMMON UPRIGHT:
Three mounting zones available

- FRONT INNER mounting zone for panels, crossmembers and backsplashes
- REAR INNER mounting zone for panels, crossmembers and backsplashes
- FRONT mounting zones for installing accessories such as shelves, cantilever arms, spool holders, computer arms, etc.

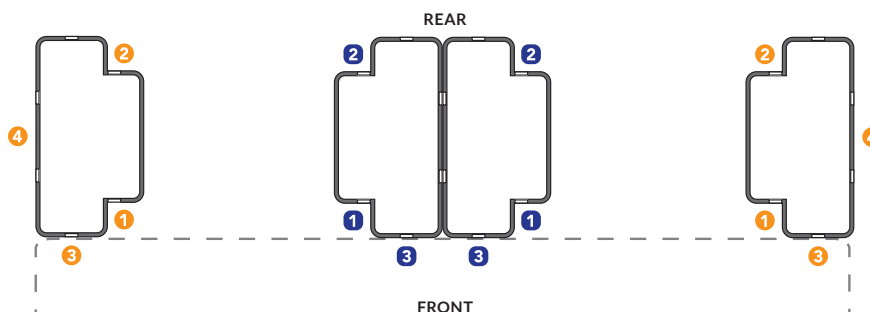


ACCESSORIES



CROSSMEMBERS

FRONT CROSSMEMBER

EP30

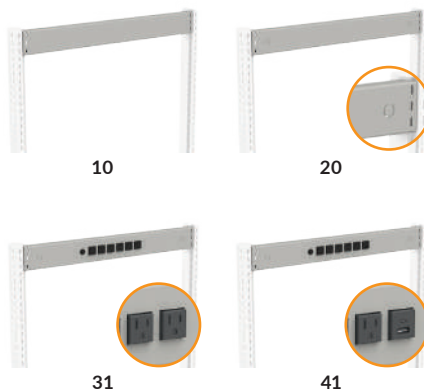

- Installs on the inner side of EU uprights ① ①
- Must be installed between two uprights to ensure rigidity of the frame
- Height: 4"
- To order: Specify the option required:
 - 10: No perforations
 - 20: Pneumatic connection
 - 31: 6 power outlets (15A) for 15A circuits
 - 41: 5 power outlets (15A) for 15A circuits and 2 USB ports (1 A, 1 C)


PRODUCT NO.	W × H
EP30-1804-0__	18" × 4"
EP30-2004-0__	20" × 4"
EP30-2404-0__	24" × 4"
EP30-3004-0__	30" × 4"
EP30-3204-0__	32" × 4"
EP30-3604-0__	36" × 4"
EP30-4804-0__	48" × 4"
EP30-6004-0__	60" × 4"
EP30-7204-0__	72" × 4"

NOTE: Two EP30 crossmembers cannot be placed back to back.

6 ACCESSORIES


REAR CROSSMEMBER

EP32

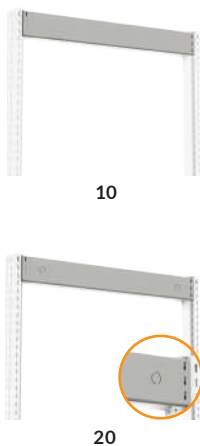

- Installs on the rear of an EP30 crossmember, between two uprights to close the back of a workstation ② ②
- The space between the EP30 crossmember and EP32 rear crossmember can be used for cable management
- Height: 4"
- To order: Specify the option required:
 - 10: No perforations
 - 20: Pneumatic connection

PRODUCT NO.	W × H
EP32-1804-0__	18" × 4"
EP32-2004-0__	20" × 4"
EP32-2404-0__	24" × 4"
EP32-3004-0__	30" × 4"
EP32-3204-0__	32" × 4"
EP32-3604-0__	36" × 4"
EP32-4804-0__	48" × 4"
EP32-6004-0__	60" × 4"
EP32-7204-0__	72" × 4"

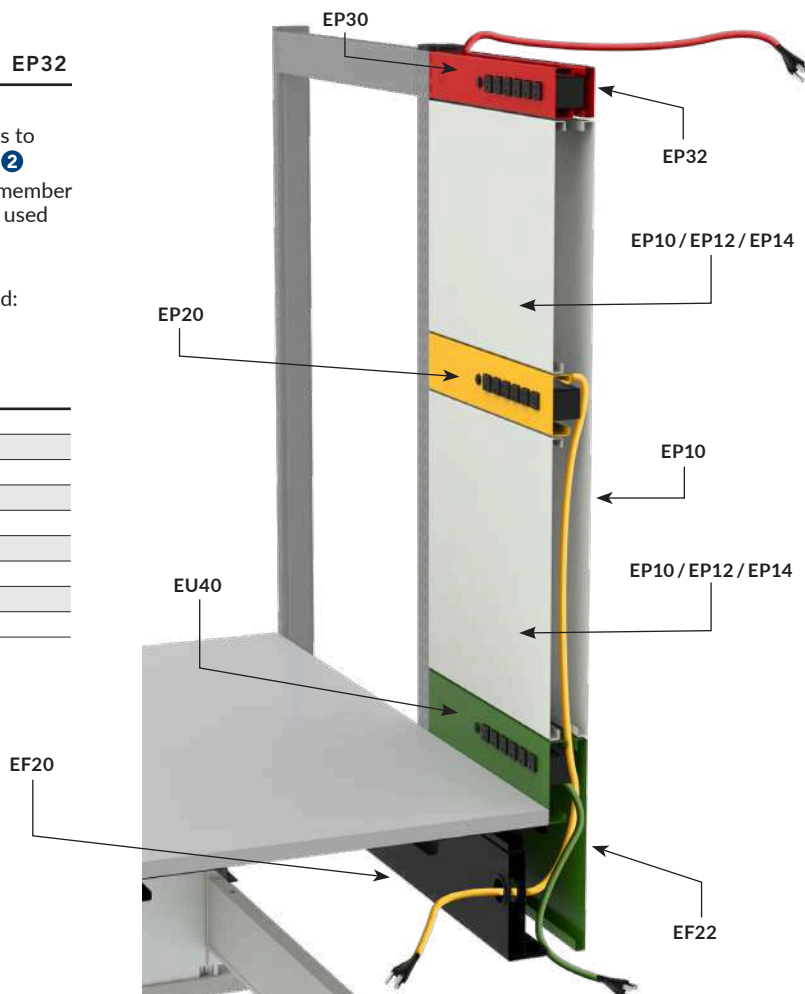


NOTE: The color scheme is used for demonstration purposes only.



BACKSPLASHES

FRONT BACKSLASH

EU40

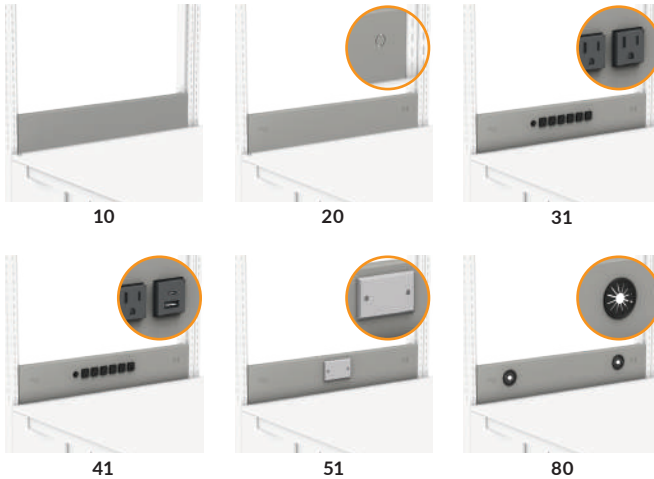

- Installs on the inner side of EU uprights ① ①
- Closes the bottom of an EU frame
- Height: 4"
- To order: Specify the option required:
 - 10: No perforations
 - 20: Pneumatic connection
 - 31: 6 power outlets (15A) for 15A circuits
 - 41: 5 power outlets (15A) for 15A circuits and 2 USB ports (1 A, 1 C)
 - 51: Perforation for installing a phone jack or network port (finishing plate included)
 - 80: Grommet

PRODUCT NO.	W × H
EU40-1804-0__	18" × 4"
EU40-2004-0__	20" × 4"
EU40-2404-0__	24" × 4"
EU40-3004-0__	30" × 4"
EU40-3204-0__	32" × 4"
EU40-3604-0__	36" × 4"
EU40-4804-0__	48" × 4"
EU40-6004-0__	60" × 4"
EU40-7204-0__	72" × 4"

NOTE: Two EU40 backsplashes cannot be placed back to back.

REAR FINISHING PANEL FOR UPRIGHT BRACKET EF22



- Installs on the rear of an EU40 backslash between two uprights to close the back of the workstation ② ②
- Attractive appearance
- Actual height: 14.5"
- Covers the upright bracket and back of the EU40 backslash
- Extends 4" higher than the work surface

PRODUCT NO.	W × H
EF22-18010	18" × 4"
EF22-20010	20" × 4"
EF22-24010	24" × 4"
EF22-30010	30" × 4"
EF22-32010	32" × 4"
EF22-36010	36" × 4"
EF22-48010	48" × 4"
EF22-60010	60" × 4"
EF22-72010	72" × 4"

BACKSLASH COVER EA71

EA71



- Fills the gap between an EU40 front backslash and an EF22 rear finishing panel for upright bracket
- The addition of the backslash cover fills the space, initially provided, for cable management
- Improves the aesthetics of the workstation
- Removable as needed

PRODUCT NO.	WIDTH
EA71-18	18"
EA71-20	20"
EA71-24	24"
EA71-30	30"
EA71-32	32"
EA71-36	36"
EA71-48	48"
EA71-60	60"
EA71-72	72"

ACCESSORIES



PANELS

PRIVACY PANEL

EP10



- Painted steel
- Installs on the inner side of EU uprights
1 1 2 2
- Closes off the back of a workstation or can be used as a magnetic bulletin board
- To order: Complete the product number with the height required: 04", 08", 10", 12", 14", 15", 16", 17", 20", 24", 28", 30", 34" or 40"

PRODUCT NO.	WIDTH
EP10-18__	18"
EP10-20__	20"
EP10-24__	24"
EP10-30__	30"
EP10-32__	32"
EP10-36__	36"

NOTES: The panel width must be the same width as the zone, e.g., a 30"W panel must be installed on a 30"W zone.

Actual Width: Nominal - 2 1/16".

Actual Height: Nominal - 5/64".

UTILITY PANEL

 EP12


- Painted steel
- Installs on the inner side of EU uprights
1 1 2 2
- Includes perforations spaced 1" apart c/c for hanging a range of hooks
- Load capacity: 50lb. per square foot or 250lb. maximum per panel
- Compatible with WM9F, WM9G, WM9H, WM9J and WM9L light-duty hooks, and WM9A and WM9B heavy-duty hooks
- Compatible with WM9C bin rails, WM9D can holders, WM9M and WM9N hooks, WM9Q tool holders, WM9P spool and roll holders, WM9R hammers support, WM9S document holder, and EA28 and WM21 shelves
- To order: Complete the product number with the height required: 04", 08", 10", 12", 14", 15", 16", 17", 20", 24", 28", 30", 34" or 40"


PRODUCT NO.	WIDTH	NO. OF HOLES
EP12-18__	18"	16
EP12-20__	20"	18
EP12-24__	24"	22
EP12-30__	30"	28
EP12-32__	32"	30
EP12-36__	36"	34

NOTES: The panel width must be the same width as the zone, e.g., a 30"W panel must be installed on a 30"W zone.

Actual Width: Nominal - 2 1/16".

Actual Height: Nominal - 5/64".

PLASTIC BIN PANEL

 EP14


- Painted steel
- Installs on the inner side of EU uprights
1 1 2 2
- Holds RG20 plastic bins, [see page 285](#)
- Load capacity: 50lb. per square foot or 250lb. maximum per panel
- Compatible with most brands of plastic bins (with hanging lip) on the market
- To order: Complete the product number with the height required: 08", 10", 12", 14", 15", 16", 17", 20", 24", 28", 30", 34" or 40"

PRODUCT NO.	WIDTH
EP14-18__	18"
EP14-20__	20"
EP14-24__	24"
EP14-30__	30"
EP14-32__	32"
EP14-36__	36"

NOTES: The panel width must be the same width as the zone, e.g., a 30"W panel must be installed on a 30"W zone.

Actual Width: Nominal - 2 1/16".


Actual Height: Nominal - 5/64".



ELECTRICAL APPLICATIONS

POWER OUTLET CHANNEL

EP20

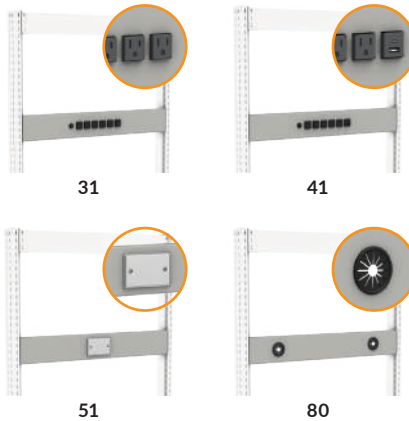

- Installs at any height between EU uprights (excluding the space needed for the crossbar and backslash) ① ① ② ②
- Height: 4"
- To order: Specify the option required:
 - 31: 6 power outlets (15A) for 15A circuits
 - 41: 5 power outlets (15A) for 15A circuits and 2 USB ports (1 A, 1 C)
 - 51: Perforation for installing a phone jack or network port (finishing plate included)
 - 80: Grommet


PRODUCT NO.	W x H
EP20-1804-0__	18" x 4"
EP20-2004-0__	20" x 4"
EP20-2404-0__	24" x 4"
EP20-3004-0__	30" x 4"
EP20-3204-0__	32" x 4"
EP20-3604-0__	36" x 4"
EP20-4804-0__	48" x 4"
EP20-6004-0__	60" x 4"
EP20-7204-0__	72" x 4"

NOTE: Two EP20 power outlet channels cannot be placed back to back.

SHELVES

TILTABLE SHELF

EA20

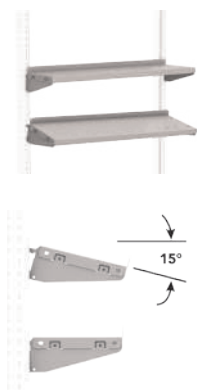


- Hooks onto the front of EU uprights ③ ③
- Includes slots spaced 2" apart c/c for installing SH52 dividers, [see page 196](#)
- Includes two side brackets which can be placed at right angles or at a 15° angle
- Shelf is reversible and the edge can be used as a backslash or support for plastic bins or for ring binders with a 12" deep shelf
- Load capacity: 100lb. (evenly distributed)

PRODUCT NO.	W x D
EA20-1808	18" x 8"
EA20-1812	18" x 12"
EA20-2008	20" x 8"
EA20-2012	20" x 12"
EA20-2408	24" x 8"
EA20-2412	24" x 12"
EA20-3008	28" x 8"
EA20-3012	30" x 12"
EA20-3208	32" x 8"
EA20-3212	32" x 12"
EA20-3608	36" x 8"
EA20-3612	36" x 12"

TILTABLE PAN

EA22

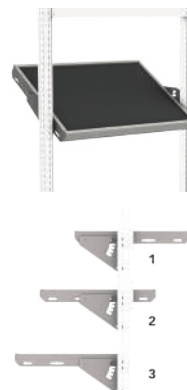

- Hooks onto the inner side of EU uprights ① ① ② ②
- Three positions available: front, center or back
- Tilts from 0 to 30° with five easily adjustable positions
- Includes a full-size rubber mat
- Load capacity: 200lb.

PRODUCT NO.	W x D	USABLE SURFACE AREA
EA22-1820	18" x 20"	13" x 18½"
EA22-2020	20" x 20"	15" x 18½"
EA22-2420	24" x 20"	19" x 18½"
EA22-3020	30" x 20"	25" x 18½"
EA22-3220	32" x 20"	27" x 18½"
EA22-3620	36" x 20"	31" x 18½"

SHELF BACKSTOP

EA07 / EA09



- EA07: Painted steel
- EA09: Stainless steel
- Attaches to EA08 / 10 / 11 / 12 / 14 / 16 / 17 shelves
- Prevents objects from falling from shelves
- Extends above shelf by 1"
- Attaches to the front or back of the shelf

PRODUCT NO.	WIDTH
EA__-18	18"
EA__-20	20"
EA__-24	24"
EA__-30	30"
EA__-32	32"
EA__-36	36"
EA__-48	48"
EA__-60	60"
EA__-72	72"

ACCESSORIES



LED LIGHT FOR SHELF


WS7A



- Brightens shaded areas under shelves
- Emits a brighter light than fluorescent tubes and is more energy efficient
- Color temperature: 5000-6000K (cold)
- Includes a 10' power cord
- Installs under the riser shelf
- Two different galvanized steel adapters available
 - Adapter 01 for EA08, EA14, EA16 and EA17 shelves
 - Adapter 02 for EA10, EA11 and EA12 shelves
- Possibility to add a motion sensor by completing the product number with MS.

WIDTH LIGHT	FOR SHELF
18", 24", 30"	36" et plus
36"	48" et plus
48"	60" et plus
60"	72" et plus

NOTE: The motion detector is not available for a width of 18".

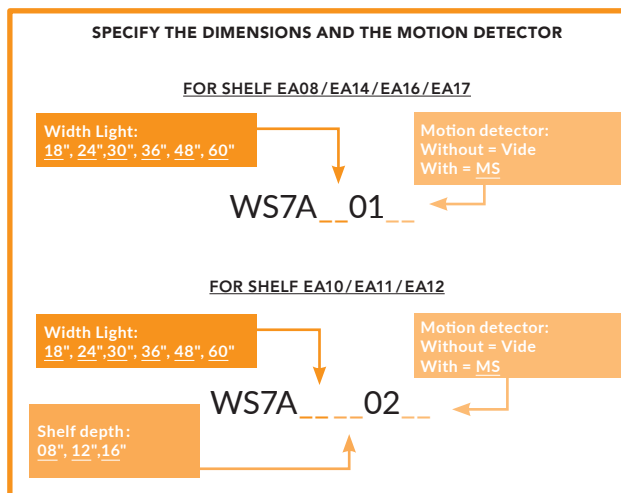

RESISTANT ACRYLIC/PVC LAMINATE SHELF

EA08



- Hooks onto the front of EU uprights 3 3
- Includes two side brackets which can be placed at right angles or at a 15° angle
- Sides protected with 3mm-thick durable PVC
- Compatible with a backsplash or EA07 / EA09 shelf backstop
- Thickness: 1 5/16"
- Color: gray

W	D	LOAD CAPACITY*
48" and under	8" / 12" / 16"	200 lb
	8"	140 lb
60"	12"	200 lb
	16"	200 lb
	8"	80 lb
72"	12"	120 lb
	16"	160 lb

NOTE: * Weight evenly distributed

PAINTED STEEL SHELF

EA10 / EA11



- EA10: Solid version
- EA11: Perforated version
- Hooks onto the front of EU uprights 3 3
- Includes two side brackets which can be placed at right angles or at a 15° angle
- Perforated version includes slots spaced 2" apart c/c for installing SH52 dividers, [see page 196](#)
- Compatible with a backsplash or EA07 / EA09 shelf stop
- Thickness: 1 5/16"
- Load capacity: 200lb. (evenly distributed)
- To order: Specify the type of shelf required

STAINLESS STEEL SHELF

EA12



- Hooks onto the front of EU uprights 3 3
- Includes two side brackets which can be placed at right angles or at a 15° angle
- Compatible with a backsplash or EA07 / EA09 shelf stop
- Thickness: 1 5/16"
- Load capacity: 200lb. (evenly distributed)

LAMINATED WOOD SHELF

EA14



- Hooks onto the front of EU uprights 3 3
- Includes two side brackets which can be placed at right angles or at a 15° angle
- Compatible with a backsplash or EA07 / EA09 shelf stop
- Thickness: 1 5/16"
- Made from varnished hardwood slats
- Attractive appearance
- Load capacity: 200lb. (evenly distributed)



PLASTIC LAMINATE SHELF

EA16



- Hooks onto the front of EU uprights ③ ③
- Includes two side brackets which can be placed at right angles or at a 15° angle
- Sides protected with 3mm-thick durable PVC
- Compatible with a backsplash or EA07 / EA09 shelf backstop
- Thickness: 1 5/16"
- Attractive appearance
- To order: Add the color code to the product number, e.g., EA16-1808-BA for a black shelf



W	D	LOAD CAPACITY*
48" and under	8" / 12" / 16"	200 lb
60"	8"	140 lb
	12"	200 lb
	16"	200 lb
	8"	80 lb
72"	12"	120 lb
	16"	160 lb

NOTE: * Weight evenly distributed

DISSIPATIVE SHELF

EA17



- Hooks onto the front of EU uprights ③ ③
- Includes two side brackets which can be placed at right angles or at a 15° angle
- Sides protected with 3mm-thick durable PVC
- Compatible with a backsplash or EA07 / EA09 shelf backstop
- Thickness: 1 5/16"
- Dissipates electrical charges that can damage electronic components
- The resistance point to point and point to ground is between 10⁶Ω and 10⁹Ω
- Complies with the ESD-S4.1-1997 standard
- Color: white

W	D	LOAD CAPACITY*
48" and under	8" / 12" / 16"	200 lb
60"	8"	140 lb
	12"	200 lb
	16"	200 lb
	8"	80 lb
72"	12"	120 lb
	16"	160 lb

NOTE: * Weight evenly distributed

DIMENSIONS		TYPE OF SHELF					
W	D	ACRYLIC/PVC LAMINATE	PAINTED STEEL	STAINLESS STEEL	LAMINATED HARDWOOD	PLASTIC LAM.	DISSIPATIVE
18"	8"	EA08-1808-GI	EA1_-1808	EA12-1808	EA14-1808	EA16-1808-__	EA17-1808-WB
	12"	EA08-1812-GI	EA1_-1812	EA12-1812	EA14-1812	EA16-1812-__	EA17-1812-WB
	16"	EA08-1816-GI	EA1_-1816	EA12-1816	EA14-1816	EA16-1816-__	EA17-1816-WB
20"	8"	EA08-2008-GI	EA1_-2008	EA12-2008	EA14-2008	EA16-2008-__	EA17-2008-WB
	12"	EA08-2012-GI	EA1_-2012	EA12-2012	EA14-2012	EA16-2012-__	EA17-2012-WB
	16"	EA08-2016-GI	EA1_-2016	EA12-2016	EA14-2016	EA16-2016-__	EA17-2016-WB
24"	8"	EA08-2408-GI	EA1_-2408	EA12-2408	EA14-2408	EA16-2408-__	EA17-2408-WB
	12"	EA08-2412-GI	EA1_-2412	EA12-2412	EA14-2412	EA16-2412-__	EA17-2412-WB
	16"	EA08-2416-GI	EA1_-2416	EA12-2416	EA14-2416	EA16-2416-__	EA17-2416-WB
30"	8"	EA08-3008-GI	EA1_-3008	EA12-3008	EA14-3008	EA16-3008-__	EA17-3008-WB
	12"	EA08-3012-GI	EA1_-3012	EA12-3012	EA14-3012	EA16-3012-__	EA17-3012-WB
	16"	EA08-3016-GI	EA1_-3016	EA12-3016	EA14-3016	EA16-3016-__	EA17-3016-WB
32"	8"	EA08-3208-GI	EA1_-3208	EA12-3208	EA14-3208	EA16-3208-__	EA17-3208-WB
	12"	EA08-3212-GI	EA1_-3212	EA12-3212	EA14-3212	EA16-3212-__	EA17-3212-WB
	16"	EA08-3216-GI	EA1_-3216	EA12-3216	EA14-3216	EA16-3216-__	EA17-3216-WB
36"	8"	EA08-3608-GI	EA1_-3608	EA12-3608	EA14-3608	EA16-3608-__	EA17-3608-WB
	12"	EA08-3612-GI	EA1_-3612	EA12-3612	EA14-3612	EA16-3612-__	EA17-3612-WB
	16"	EA08-3616-GI	EA1_-3616	EA12-3616	EA14-3616	EA16-3616-__	EA17-3616-WB
48"	8"	EA08-4808-GI	EA1_-4808	EA12-4808	EA14-4808	EA16-4808-__	EA17-4808-WB
	12"	EA08-4812-GI	EA1_-4812	EA12-4812	EA14-4812	EA16-4812-__	EA17-4812-WB
	16"	EA08-4816-GI	EA1_-4816	EA12-4816	EA14-4816	EA16-4816-__	EA17-4816-WB
60"	8"	EA08-6008-GI	EA1_-6008	EA12-6008	EA14-6008	EA16-6008-__	EA17-6008-WB
	12"	EA08-6012-GI	EA1_-6012	EA12-6012	EA14-6012	EA16-6012-__	EA17-6012-WB
	16"	EA08-6016-GI	EA1_-6016	EA12-6016	EA14-6016	EA16-6016-__	EA17-6016-WB
72"	8"	EA08-7208-GI	EA1_-7208	EA12-7208	EA14-7208	EA16-7208-__	EA17-7208-WB
	12"	EA08-7212-GI	EA1_-7212	EA12-7212	EA14-7212	EA16-7212-__	EA17-7212-WB
	16"	EA08-7216-GI	EA1_-7216	EA12-7216	EA14-7216	EA16-7216-__	EA17-7216-WB

NOTE: The shelves are installed on two uprights and can be placed above a common upright.

ACCESSORIES



ADJUSTABLE DIVIDER

EA06



- Attaches to EA08 / 10 / 11 / 12 / 14 / 16 / 17 shelves
- Slides into the desired position
- Not compatible with EA07 / EA09 shelf backstop

PRODUCT NO.	D×H	FOR SHELF
EA06-0806	8"×6"	8"D
EA06-0810	8"×10"	8"D
EA06-1206	12"×6"	12"D
EA06-1210	12"×10"	12"D
EA06-1606	16"×6"	16"D
EA06-1610	16"×10"	16"D

TOOL RAIL

EA47



- Holds one or more WM48 balancer trolleys
- Installs on EA40 cantilever overhead supports (sold separately)
- Easily adjustable depth
- Color: black
- Load capacity: 25lb.

PRODUCT NO.	WIDTH
EA47-30	30"
EA47-32	32"
EA47-36	36"
EA47-48	48"
EA47-60	60"
EA47-72	72"

BALANCER TROLLEY

WM48



- Inserts into EA47 tool rail
- Color: black
- Holds a pneumatic connection

PRODUCT NO.
WM48-01

TOOL BALANCER

WM49



- For hanging tools over the work surface
- 6' metal cable with tension adjustment
- Color: black
- Load capacity: 3lb. max.

PRODUCT NO.
WM49-01



PARTIAL DIVIDER

SH52



- Compatible with EA20 and EA11 shelves
- Adjustable in 2" increments c/c
- Inserts into the shelf slots forwards or backwards

PRODUCT NO.	D×H	FOR SHELF
SH52-1206	7½"×5½"	8"D and 12"D
SH52-1806	13½"×5½"	16"D

OVERHEAD SUPPORTS



EA40



- Sold in pairs
- Supports an EA43 light and EA47 tool rail
- Hooks onto the front of EU uprights and on the top crossmember. The crossmember is required for installation
- Locks into place via the lockable endcap on EU uprights
- Load capacity: 60lb. per pair
- Adds 2½" to the height of the frame
- Includes channels for cable management
- Includes a foam cable cover

PRODUCT NO.	DEPTH
EA40-26-02	26"

OVERHEAD LED WORKSTATION LIGHT

EA43



- Installs on EA40 overhead supports (sold separately)
- Includes mounting brackets. The light rotates 300° in the brackets to set the direction of the light
- Installs on frames with two or three uprights
- Emits a bright light while being energy efficient
- Color temperature: 5000-6000K (cold)
- Color rendering index (CRI): 85+
- Includes a 10' power cord
- Up to 7 lights can be connected in series
- Each light is independent and controlled by its own switch
- Optional 12" LED connecting cable available (EQ10-12)
- To add a motion sensor, add "MS" to the product number, e.g., EA43-3602MS for a 36"W overhead LED workstation light with motion sensor.

PRODUCT NO.	WIDTH
EA43-18__	18"
EA43-24__	24"
EA43-30__	30"
EA43-36__	36"
EA43-48__	48"
EA43-60__	60"
EA43-72__	72"

NOTE: The motion detector is not available for a width of 18".



PLASTIC BIN HOLDER

EA32



- Hooks onto the front of EU uprights ③ ③
- Adjustable in 1" increments c/c
- Can be installed at a right angle or angled 15°
- Compatible with most brands of plastic bins (with hanging lip) on the market
- Compatible with all RG20 plastic bin sizes, [see page 285](#)
- Load capacity: 75lb. (evenly distributed)

PRODUCT NO.	WIDTH
EA32-18	18"
EA32-20	20"
EA32-24	24"
EA32-30	30"
EA32-32	32"
EA32-36	36"
EA32-48	48"
EA32-60	60"
EA32-72	72"

NOTE: Cannot be placed above a common upright.

PAPER AND CARDBOARD SPOOL HOLDER

EA33




- Hooks onto the front of EU uprights ③ ③
- Includes two end brackets and one tube
- Tube diameter: 1"
- Spool is inserted by pivoting one end of the tube, only one person needed
- Color: black
- Load capacity: 75lb.

PRODUCT NO.	WIDTH
EA33-18	18"
EA33-20	20"
EA33-24	24"
EA33-30	30"
EA33-32	32"
EA33-36	36"
EA33-48	48"
EA33-60	60"
EA33-72	72"


NOTE: Not compatible with an EP10, EP12, EP14 panel and EP20 energy modules.

WIRE SPOOL HOLDER

EA31



01



02

- 01: Single version
- 02: Double version
- Hooks onto the front of EU uprights ③ ③
- Includes two side brackets and one or two tubes
- Tube diameter: 3/4"
- Maximum spool diameter: 01 = 14.5" 02 = 4.5"
- Load capacity: 50lb.
- To order: Specify the tube number required

PRODUCT NO.	WIDTH
EA31-18__	18"
EA31-20__	20"
EA31-24__	24"
EA31-30__	30"
EA31-32__	32"
EA31-36__	36"

LED WORK LAMP WITH MAGNIFIER



EA58



- Version 01 and 02 hooks onto the side ④ or front ③
- Version 03 installs directly on the work surface
- Diopter: 5 (2.25x magnification)
- Color: black

PRODUCT NO.	INSTALLATION
EA58-01	Includes a bracket for EU uprights
EA58-02	Includes a bracket for EU uprights and an arm to extend the reach by 12"
EA58-03	Installs directly on the work surface

POWER OUTLET STRIP

EA89



- Hooks onto the side ④ or front ③
- 15A power outlet strip with circuit breaker

PRODUCT NO.	LENGTH.	CABLE	NO. OF OUTLETS
EA89-01	12"	15'	6, with on/off switch

DOCUMENT HOLDER



EA56




- Hooks onto the side ④ or front ③
- The document holder (14" x 13 1/2") includes a document clip and an edge to support binders
- Color: black
- Load capacity: 20lb.

PRODUCT NO.	ARM
EA56-01	6"
EA56-02	12"

ACCESSORIES



LIGHT-DUTY HOOKS

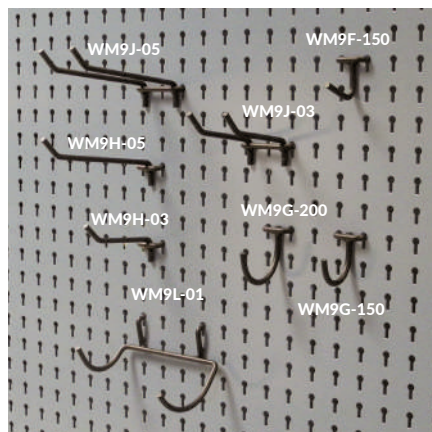


- For storing various types of parts, tools and accessories
- Compatible with all panels currently available on the market (¼" dia. holes)
- Compatible with EP12 utility panels

TYPE/PACK	SIZE	PRODUCT NO.
Straight hooks x 20	1 ½"D	WM9F-150
Single Loop Hooks x 20	1 ½" dia.	WM9G-150
Single Loop Hooks x 20	2" dia.	WM9G-200
Double back single hooks x 10	3"D	WM9H-03
Double back single hooks x 10	5"D	WM9H-05
Double back double hooks x 10	3"D	WM9J-03
Double back double hooks x 10	5"D	WM9J-05
Drill holder x 1	5"W x 3 ½"D	WM9L-01

HEAVY-DUTY SQUARE HOOK

WM9A




- Hooks onto EP12 panels
- Flat surface on top
- Raised end to prevent accessories or tools from sliding off
- Hook-on installation
- Includes side notches for extra stability
- Load capacity: 50lb.
- Sold individually
- 1"W (two holes)
- Color: black

PRODUCT NO.	LENGTH
WM9A-03	3"
WM9A-06	6"
WM9A-12	12"

HEAVY-DUTY ROUND HOOK

WM9B




- Hooks onto EP12 panels
- ¾" diameter tube
- Tools and accessories slide on and off easily
- Hook-on installation
- Includes side notches for extra stability
- Load capacity: 50lb.
- Sold individually
- Hook base: 2"W (three holes) x 5"H
- Color: black

PRODUCT NO.	LENGTH
WM9B-03	3"
WM9B-06	6"
WM9B-12	12"

PLIERS HOLDER

WM9M




- Hooks onto EP12 panels
- Holds up to six pliers
- Color: black

PRODUCT NO.	W x D x H
WM9M-01	9" x 2 ½" x 2"

SCREWDRIVER HOLDER

WM9N




- Hooks onto EP12 panels
- Holds 6-12 screwdrivers
- Color: black

PRODUCT NO.	VERSION	W x D x H
WM9N-01	Single	9" x 1 ½" x 2"
WM9N-02	Double	9" x 3 ¼" x 2"

LONG TOOL HOLDER

WM9Q



- Hooks onto EP12 panels
- Holds up to three long tools
- Color: black

PRODUCT NO.	W x D x H
WM9Q-08	8" x 3" x 4"

HAMMER HOLDER

WM9R




- Hooks onto EP12 panels
- Designed to hold most plastic or rubber mallets and ball-peen hammers
- Holds up to two hammers
- Color: black

PRODUCT NO.	W x D x H
WM9R	9 ½" x 5 ½" x 2 ½"



VINYL RUB-ON IDENTIFICATION DECAL

WM91




- For easy identification of where tools should be stored on utility panels
- Contrasting color so it's easy to notice when a tool is missing and what kind of tool it is
- Ideal for 5S method tool management
- Sold in 2"W x 8"L rolls

PRODUCT NO.

WM91-01J

CAN HOLDER

WM9D



- Hooks onto EP12 panels
- Ideal for storing various items of different sizes such as aerosol cans
- Includes side notches for extra stability
- Widths available: 6" (7 holes), 9" (10 holes), 12" (13 holes), 14" (15 holes), 15" (16 holes) and 20" (21 holes)
- To order: Specify the width required

PRODUCT NO.

D x H

WM9D-__

3" x 4"

WIRE SPOOL AND ROLL HOLDER

WM9P




- Hooks onto EP12 panels
- Ideal for wire spools or paper towel rolls
- Tube diameter: 3/4"
- Maximum wire spool diameter: 12"
- Load capacity: 50lb.

PRODUCT NO.	WIDTH	NO. OF HOLES
WM9P-0901	9"	10
WM9P-1201	12"	13
WM9P-1501	15"	16
WM9P-2001	20"	21
WM9P-2301	23"	24
WM9P-2601	26"	27

PLASTIC BIN RAIL

WM9C



- Hooks onto EP12 panels
- Plastic bins hook onto the rail for efficient storage of small parts
- Hook-on installation
- Includes side notches for extra stability
- Compatible with all brands of plastic bins with hanging lip on the market
- Compatible with RG20 plastic bins, [see page 285](#)
- Bins sold separately
- Widths available: 6" (7 holes), 9" (10 holes), 12" (13 holes), 15" (16 holes), 20" (21 holes), 23" (24 holes) and 26" (27 holes)
- To order: Specify the width required

PRODUCT NO.


HEIGHT

WM9C-__

3"

LIGHT-DUTY SHELF

EA28



- Hooks onto EP12 panels
- For storing small items
- 15"W (16 holes)
- Includes 1"H backstops on front and back
- Load capacity: 10lb.

PRODUCT NO.


W x D

EA28-1508

15" x 8"

DOCUMENT HOLDER

WM9S



- Hooks onto EP12 panels
- Designed for letter and legal size documents
- Includes a front cut-out to help identify and grab documents


PRODUCT NO.

W x D x H

WM9S-01

12 1/2" x 3 3/4" x 10 1/2"

COMPUTER ARTICULATED ARMS

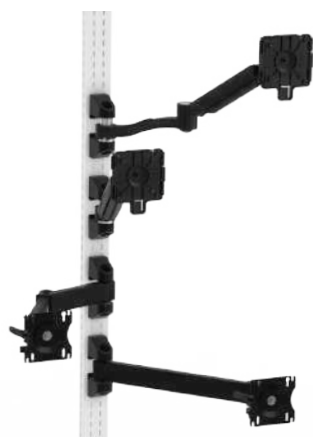

- Hooks onto the side [4](#) or front [3](#)
- To learn about all the heavy-duty articulated arm options, [see pages 294-295](#)
- To learn about all the height-adjustable articulated arm options, [see pages 296-297](#)



ACCESSORIES



UPPER STORAGE CABINETS

STORAGE CABINET WITHOUT DOOR



- Hooks onto the front of EU uprights **3 3**
- Includes one bottom shelf
- Compatible with RD05 shelves, adjustable in 1" increments c/c
- Depth: 14"
- Load capacity: 200lb

SPECIFY THE WIDTH AND HEIGHT

Width:

18", 20", 24", 30", 32", 36", 48", 60"

Height:

18", 21", 24"

ED75- 14 00

STORAGE CABINET WITH SINGLE INTEGRATED DOOR



- Hooks onto the front of EU uprights **3 3**
- Includes one bottom shelf
- Compatible with RD05 shelves, adjustable in 1" increments c/c
- Polycarbonate door provides excellent impact resistance
- Opens 180° for full access to items stored inside
- Depth: 14"
- Load capacity: 200lb



NOTE: The 18" height is only available for solid doors.

SPECIFY THE WIDTH, HEIGHT, TYPE OF DOOR AND LOCK

Width:

18", 20", 24", 30", 32", 36"

Height:

18", 21", 24"

Lock:

No lock = Empty
Key = L3
Digital code (L50) = DL
Smart (L100) = SL

Door type:

Solid = 1
Polycarbonate = 2

ED75- 14 0

STORAGE CABINET WITH DOUBLE INTEGRATED DOORS



- Hooks onto the front of EU uprights **3 3**
- Includes one bottom shelf
- Compatible with RD05 shelves, adjustable in 1" increments c/c
- Opens 180° for full access to items stored inside
- Integrated doors have a finished back for improved rigidity and aesthetics
- Polycarbonate door provides excellent impact resistance
- Depth: 14"
- Load capacity: 200lb



NOTE: The 18" height is only available for solid doors.

SPECIFY THE WIDTH, HEIGHT, TYPE OF DOOR AND LOCK

Width:

30", 32", 36", 48", 60"

Height:

18", 21", 24"

Lock:

No lock = Empty
Key = L3
Digital code (L50) = DL
Smart (L100) = SL

Door type:

Solid = 3
Polycarbonate = 4

ED75- 14 0

STORAGE CABINET WITH SLIDING DOOR



- Hooks onto the front of EU uprights **3 3**
- Includes one bottom shelf
- Compatible with RD05 shelves, adjustable in 1" increments c/c
- Polycarbonate door provides excellent impact resistance
- Provides maximum clearance for handling items stored in the cabinet
- Depth: 14"
- Load capacity: 200lb



SPECIFY THE WIDTH, HEIGHT, TYPE OF DOOR AND LOCK

Width:

48", 60"

Height:

21", 24"

Lock:

No lock = Empty
Key = L3
Digital code (L50) = DL
Smart (L100) = SL

Door type:

Solid = 7
Polycarbonate = 8

ED75- 14 0

NOTE: The storage cabinets are installed on two uprights and can pass over an adjoining upright.
Ex: A 30"W cabinet is installed on a 30"W zone. A 60"W cabinet can be installed on a 60"W zone or two 30"W zones.



STORAGE CABINET WITH FLIPPER DOOR



11

- Hooks onto the front of EU uprights 3 3
- Includes one bottom shelf
- Compatible with RD05 shelves, adjustable in 1" increments c/c
- Provides maximum clearance for handling items stored in the cabinet
- Depth: 14"
- Load capacity: 200lb

SPECIFY THE WIDTH, HEIGHT AND LOCK

Width:
18", 20", 24", 30", 32", 36", 48", 60"

Height:
18", 21", 24"

Lock:
No lock = Empty
Key = L3
Digital code (L50) = DL
Smart (L100) = SL

ED75- 14 11

SHELF


RD05



- Includes a backstop to prevent objects from falling to the bottom of the cabinet
- Adjustable in 1" increments c/c
- Load capacity: up to 100lb. evenly distributed
- Compatible with SH52 dividers, see page 196

PRODUCT NO.	W x D
RD05-1812	18" x 12"
RD05-2012	20" x 12"
RD05-2412	24" x 12"
RD05-3012	30" x 12"
RD05-3212	32" x 12"
RD05-3612	36" x 12"
RD05-4812	48" x 12"
RD05-6012	60" x 12"

COMPUTER CABINET



50

- Hooks onto the front of EU uprights 3 3
- The fan with filtration screen creates positive pressure inside the cabinet
- The monitor mount creates room for a computer and monitor in the same space
- Includes a power bar with six 15A outlets (for 15A circuit)
- Height: 21"
- Depth: 14"
- Load capacity: 200lb

SPECIFY THE WIDTH

Width:
24", 30", 32", 36"

ED76- 142150

COMPUTER CABINET WITH KEYBOARD AND MOUSE TRAY



51

- Hooks onto the front of EU uprights 3 3
- The fan with filtration screen creates positive pressure inside the cabinet
- The monitor mount creates room for a computer and monitor in the same space
- Includes a power bar with six 15A outlets (for 15A circuit)
- The keyboard and mouse tray can be tucked away under the cabinet when not in use
- Height: 21"
- Depth: 14"
- Load capacity: 200lb

SPECIFY THE WIDTH

Width:
24", 30", 32", 36"

ED76- 142152

NOTE: The storage cabinets are installed on two uprights and can pass over an adjoining upright.
Ex: A 30"W cabinet is installed on a 30"W zone. A 60"W cabinet can be installed on a 60"W zone or two 30"W zones.

ACCESSORIES



COMPUTER CABINET WITH POLYCARBONATE DOOR



51

- Hooks onto the front of EU uprights 3 3
- The fan with filtration screen creates positive pressure inside the cabinet
- The monitor mount creates room for a computer and monitor in the same space
- Includes a power bar with six 15A outlets (for 15A circuit)
- Polycarbonate door provides excellent impact resistance
- Height: 21"
- Depth: 14"
- Load capacity: 200lb

COMPUTER CABINET WITH POLYCARBONATE DOOR AND KEYBOARD AND MOUSE TRAY



53

- Hooks onto the front of EU uprights 3 3
- The fan with filtration screen creates positive pressure inside the cabinet
- The monitor mount creates room for a computer and monitor in the same space
- Includes a power bar with six 15A outlets (for 15A circuit)
- The keyboard and mouse tray can be tucked away under the cabinet when not in use
- Polycarbonate door provides excellent impact resistance
- Height: 21"
- Depth: 14"
- Load capacity: 200lb

SPECIFY THE WIDTH

Width:
24", 30"

ED76-__142151L3

SPECIFY THE WIDTH

Width:
24", 30"

ED76-__142153L3

LED LIGHT FOR CABINET

RD45



- For installation underneath an ED75 or ED76* cabinet
- Emits a brighter light than fluorescent tubes and is more energy efficient
- Color temperature:
- 5000-6000K (cool)
- To add a motion sensor, add MS to the product number, e.g., RD45-2414MS for an LED light for cabinet with motion sensor

PRODUCT NO.	HOUSING WIDTH
RD45-1814	24"
RD45-2414__	30", 32" and 36"
RD45-3614__	48"
RD45-4814__	60"

NOTES: The motion sensor is not available for 18" widths.

Not available for 18"W and 20"W housings.

*Not compatible with computer cabinets with keyboard and mouse tray.



ESD PROTECTION

ESD PROTECTION KIT FOR WORKSTATIONS

EA90-01



Grounding wrist strap
EA96-01



Wrist strap double socket
EA97-01



Grounding plug
EA99-01



Grounding cord
EA95-01

- Basic kit for grounding the operator and work surface
- Includes an EA96 wrist strap, EA97 wrist strap socket, EA95 grounding cord, and EA99 grounding plug
- Grounding wrist strap includes a 6' cord with 1MΩ resistance
- Grounding cord includes #10 screw eyelet and necessary hardware

PRODUCT NO.

EA90-01

GROUNDING CORD 6'

EA94-01



- Connects all components on the workstation to a common grounding point
- Includes eyelets on both ends for #10 screws
- Includes one #10-32 x 2" screw, one 10-32 nut, one #10 x 5/8" tapping screw, and two #10 serrated washers
- Dissipates electrical charges that can damage electronic components
- 6' long

PRODUCT NO.

EA94-01

DISSIPATIVE PAINT



- Special paint dissipates electric charges (Black 090)

NOTE: Contact Customer Service for ESD paint prices.

CONDUCTIVE PLASTIC BINS




285

DISSIPATIVE TOP



186

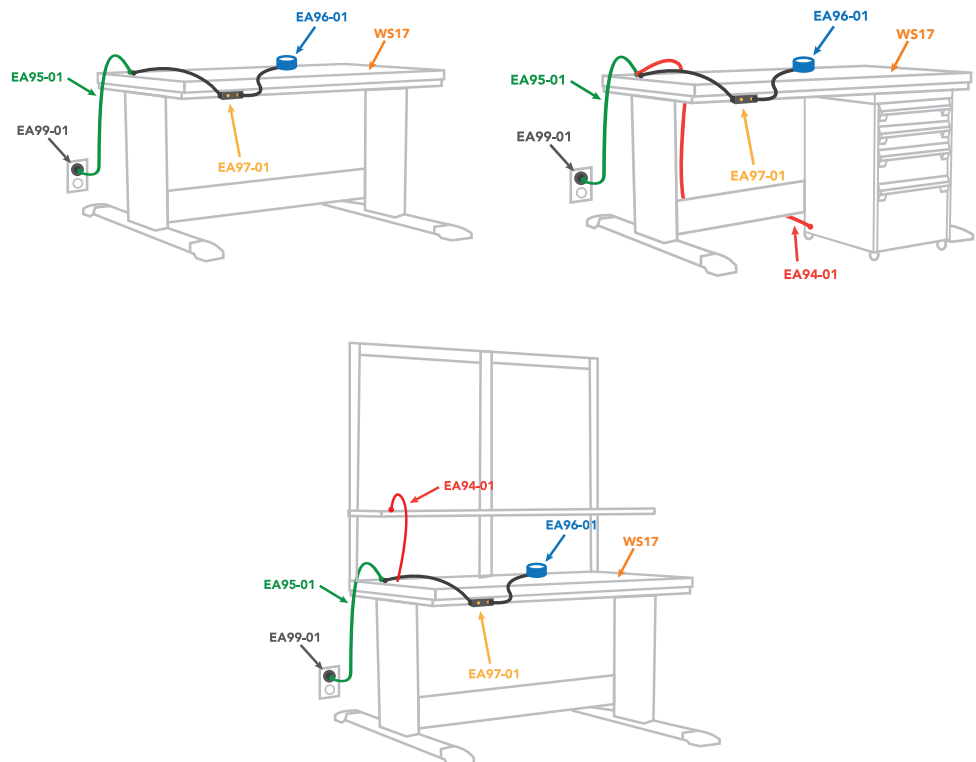

ACCESSORIES



STANDARD DRAWER UNITS

- Installs on an EF10 frame with an ED78 bracket (included)
- Depths available for a workstation with CENTERED legs: 30", 36", 42" and 48"
- Depths available for a workstation with CANTILEVER (OFF-CENTERED) legs: 30" and 36"
- To order: Specify the workstation depth
- To order a drawer lock with the drawer unit, add "L3" to the drawer product number
- A lock-in mechanism (B) is recommended for mobile applications. To order a lock-in mechanism, add "B" to the product number.



334-338

e.g., ED79-21300801L3 for an 18"W x 8"H drawer unit for a 30"D workstation with key lock

- To add accessories to the drawers, [see pages 59-60](#)



50lb. maximum load capacity for each drawer and 100lb. maximum per unit to avoid destabilizing the workstation when drawers are opened.



8"H DRAWER UNIT



1 DRAWER
ED79-21__0801__ 18" x 21" x 8"



2 DRAWERS
ED79-21__0802__ 18" x 21" x 8"

11"H DRAWER UNIT



1 DRAWER
ED79-21__1101__ 18" x 21" x 11"



2 DRAWERS
ED79-21__1102__ 18" x 21" x 11"



3 DRAWERS
ED79-21__1103__ 18" x 21" x 11"

14"H DRAWER UNIT



1 DRAWER
ED79-21__1401__ 18" x 21" x 14"



2 DRAWERS
ED79-21__1102__ 18" x 21" x 14"



3 DRAWERS
ED79-21__1103__ 18" x 21" x 14"



PRECONFIGURED CABINETS

UNDER THE WORK SURFACE

- All preconfigured models are factory assembled and ready to use
- Includes an L3 key lock on the cabinet or the door and B lock-in mechanism on the drawers
- Preconfigured models have 2" casters, including two swivel casters and two swivel casters with brakes
- To add an LP safety hasp, an L50 electronic lock or L100 smart lock on doors or on your E mobile cabinet, see page 58



334-338



100lb. maximum load capacity for each drawer and 600lb. maximum per unit (maximum 6 drawers) to prevent tipping.

IMPORTANT

Drawer compartments are included in all models. See the table for the number of compartments.



To order drawers without compartments, replace the last two digits of the model number with the next even number up.

e.g., E3BBD-2403L3B with
E3BBD-2404L3B without

DRAWER DIMENSIONS	NUMBER OF COMPARTMENTS (LAYOUT CODE)	
	18"W x 21"D	18"W x 27"D
3"H to 5"H	9 (0206)	9 (0206)
6"H and 8"H	6 (0104)	6 (0104)
12"H	4 (0102)	4 (0102)



3 DRAWERS
E3BBD-2401L3B 18" x 21" x 26"



3 DRAWERS
E3BBD-2403L3B 18" x 21" x 26"



4 DRAWERS
E3BBD-2405L3B 18" x 21" x 26"



4 DRAWERS
E3BBD-2407L3B 18" x 21" x 26"



5 DRAWERS
E3BBD-2409L3B 18" x 21" x 26"



1 DOOR / 1 SHELF
E3BBD-2411L3 18" x 21" x 26"



ACCESSORIES



PRECONFIGURED CABINETS

NEXT TO THE WORKSTATION

- All preconfigured models are factory assembled and ready to use
- Includes an L3 key lock on the cabinet or the door and B lock-in mechanism on the drawers
- Preconfigured models have 2" casters, including two swivel casters and two swivel casters with brakes
- To add an LP safety hasp, an L50 electronic lock or L100 smart lock on doors or on your E mobile cabinet, see page 58



334-338



100lb. maximum load capacity for each drawer and 600lb. maximum per unit (maximum 6 drawers) to prevent tipping.

IMPORTANT

Drawer compartments are included in all models. See the table for the number of compartments.



To order drawers without compartments, replace the last two digits of the model number with the next even number up.

e.g., E3BBD-2803L3B with
E3BBD-2804L3B without

NUMBER OF COMPARTMENTS (LAYOUT CODE)

DRAWER DIMENSIONS	18"W×21"D	18"W×27"D
3"H to 5"H	9 (0206)	9 (0206)
6"H and 8"H	6 (0104)	6 (0104)
12"H	4 (0102)	4 (0102)



4 DRAWERS
E3BBD-2801L3B 18"×21"×30"
E3BBG-2801L3B 18"×27"×30"



4 DRAWERS / 1 DOOR / 1 SHELF
E3BBD-2803L3B 18"×21"×30"
E3BBG-2803L3B 18"×27"×30"



5 DRAWERS
E3BBD-2805L3B 18"×21"×30"
E3BBG-2805L3B 18"×27"×30"



6 DRAWERS
E3BBD-3001L3B 18"×21"×32"
E3BBG-3001L3B 18"×27"×32"



4 DRAWERS
E3BBD-3003L3B 18"×21"×32"
E3BBG-3003L3B 18"×27"×32"



4 DRAWERS
E3BBD-3005L3B 18"×21"×32"
E3BBG-3005L3B 18"×27"×32"




4 DRAWERS / 1 DOOR / 1 SHELF
E3BBD-3401L3B 18"×21"×36"
E3BBG-3401L3B 18"×27"×36"



4 DRAWERS
E3BBD-3403L3B 18"×21"×36"
E3BBG-3403L3B 18"×27"×36"



1 DOOR / 2 SHELVES
E3BBD-3406L3 18"×21"×36"
E3BBG-3406L3 18"×27"×36"

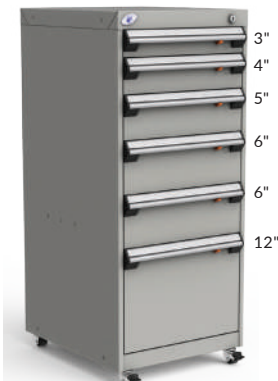

6 DRAWERS
E3BBD-4001L3B 18"×21"×42"
E3BBG-4001L3B 18"×27"×42"



3 DRAWERS
E3BBD-4003L3B 18"×21"×42"
E3BBG-4003L3B 18"×27"×42"



1 DOOR / 2 SHELVES
E3BBD-4006L3 18"×21"×42"
E3BBG-4006L3 18"×27"×42"

